


K2214L



K3214L

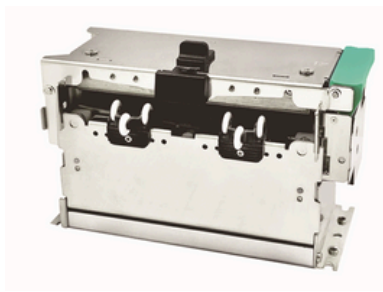

K4214L

SPECIFICATIONS

- Tailored specifically for direct thermal printers to accommodate **LINERLESS** labels.
- Features a **Non-Stick Easy-load** and **autoload** design.
- Designed to be easily disassembled and cleaned.
- Boasts a cutting life of up to 1.0 million cuts.
- Supports a maximum paper thickness of 0.18mm.
- Offers a maximum print speed of 150mm/s for **Linerless** labels.
- Incorporates an innovative Label Taken design.
- Optimizes kiosk solutions with our Side-Open Printer Innovation.

Printer Code	K2214L	K3214L	K4214L
Printer Size	2 inch	3 inch	4 inch
Supply Voltage	24V DC		
Number of Dots	448 dots	640 dots	832 dots
Paper Thickness	0.06 to 0.15mm	0.06 to 0.18mm	0.06 to 0.18mm
Resolution	200dpi		
Max. Print Width	56mm	80mm	104mm
Max. Paper Width	Max. 58.4mm (2.29 inch)	Max. 84.4mm (3.32 inch)	Max. 112.4mm (4.42 inch)
Print Speed	Max. 150 mm/s		
TPH Life	150km		
Sensor	Label taken/Cover Open/Paper In/Black Mark/Cutter Open		
Cutting Life	Varies based on customer's usage environment and cutting material		
Interface	USB2.0FS		
Machine Size	102.5 x 77.2 x 78.5mm	132.5 x 77.2 x 78.5mm	162.5 x 77.2 x 78.5mm

*Customers can opt for the control board as needed

Health-Care



Food and Beverage



Logistics



Scale




Travel



*If the product you're looking for isn't listed, it may be a custom item. Please reach out to us for further assistance.

K3211N

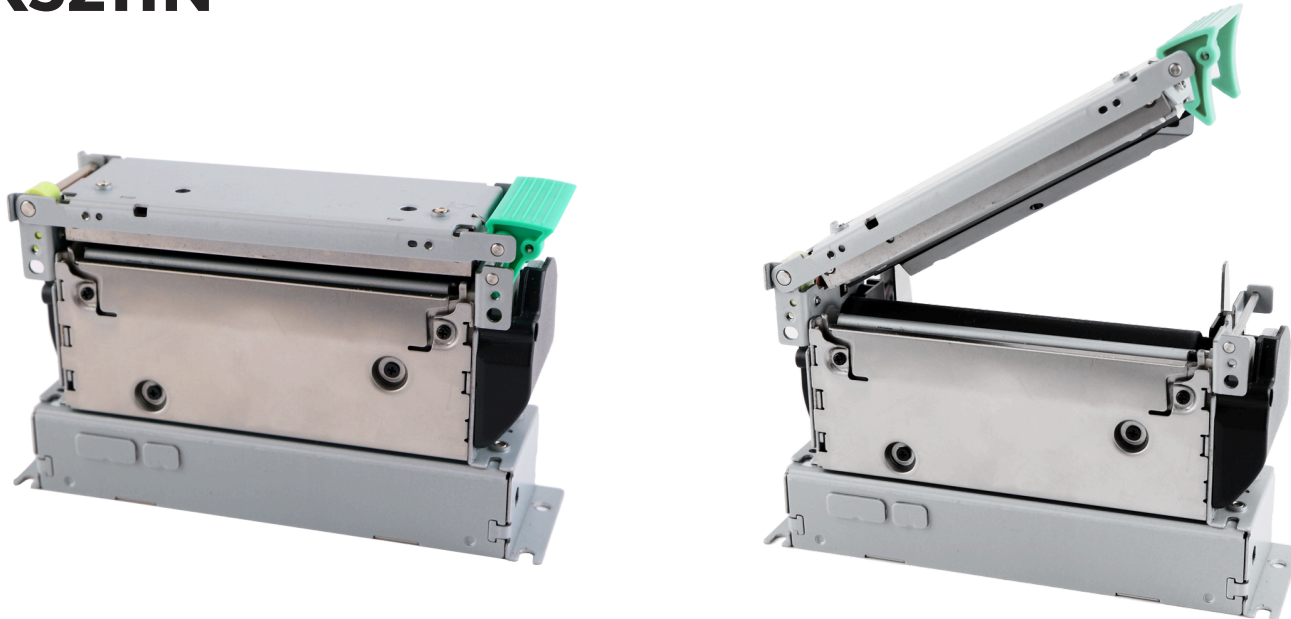



SPECIFICATIONS

- Thermal printer module in mini design
- Boasts a cutting life of up to **1.0 million** cuts.
- Designed to be easily disassembled and cleaned.
- Easy paper-loading and jam-free cutter design
- Optimizes kiosk solutions with our Side-Open Printer Innovation.
- Easily embedded into any kind of instruments and devices

Printer Size	3 inch
Supply Voltage	24V DC
Number of Dots	640 dots
Paper Thickness	0.06 to 0.15mm
Resolution	200dpi
Max. Print Width	80±0.2mm
Max. Paper Width	Max. 82.5mm (3.24 inch)
Print Speed	Max. 250 mm/s
TPH Life	150km
Sensor	Cover Open/Paper In/Black Mark
Cutting Life	1000000 times (Ordinary paper thickness 0.06mm/60 g/m2, Normal temperature)
Interface	RS323, USB
Machine Size	113 x 34.5 x 72.7mm

*If the product you're looking for isn't listed, it may be a custom item. Please reach out to us for further assistance.

K3211L

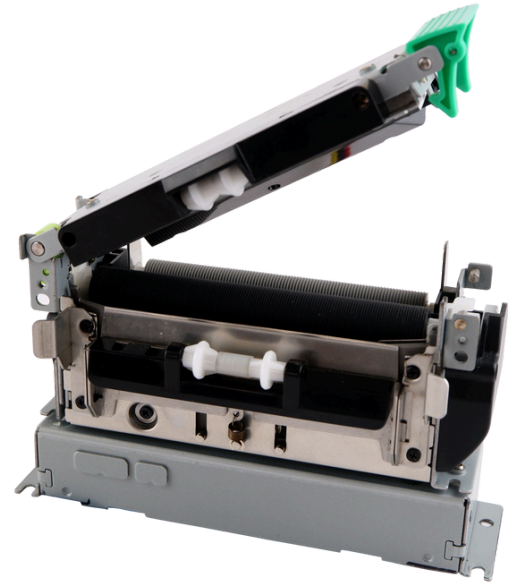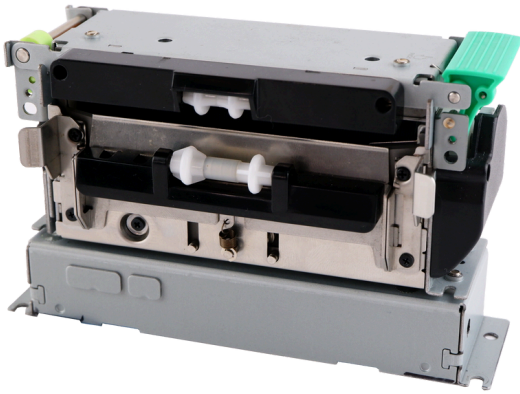

SPECIFICATIONS

- Tailored specifically for direct thermal printers to accommodate **LINERLESS** labels.
- Features a **Non-Stick** Easy-load and autoload design.
- Designed to be easily disassembled and cleaned.
- Boasts a cutting life of up to 1.0 million cuts.
- Offers a maximum print speed of 150mm/s for **Linerless** labels.
- Incorporates an innovative Label Taken design.
- Optimizes kiosk solutions with our Side-Open Printer Innovation.

Printer Size	3 inch
Supply Voltage	24V DC
Number of Dots	640 dots
Paper Thickness	0.06 to 0.15mm
Resolution	200dpi
Max. Print Width	80±0.2mm
Max. Paper Width	Max. 82.5mm (3.24 inch)
Print Speed	Max. 150mm/s
TPH Life	150 km
Sensor	Label Taken/ Cover Open/Paper In/Black Mark
Cutting Life	Varies based on customer's usage environment and cutting material
Interface	RS232, USB
Machine Size	113 x 34.5 x 51mm

Health-Care



Food and Beverage



Logistics



Scale



Travel



*If the product you're looking for isn't listed, it may be a custom item. Please reach out to us for further assistance.